

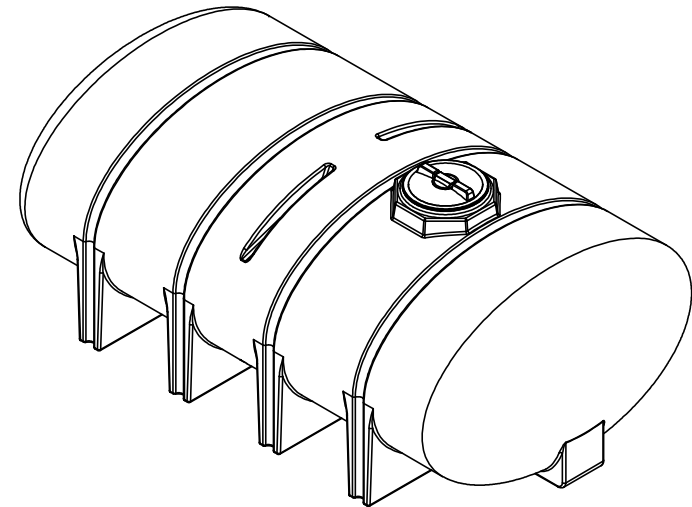


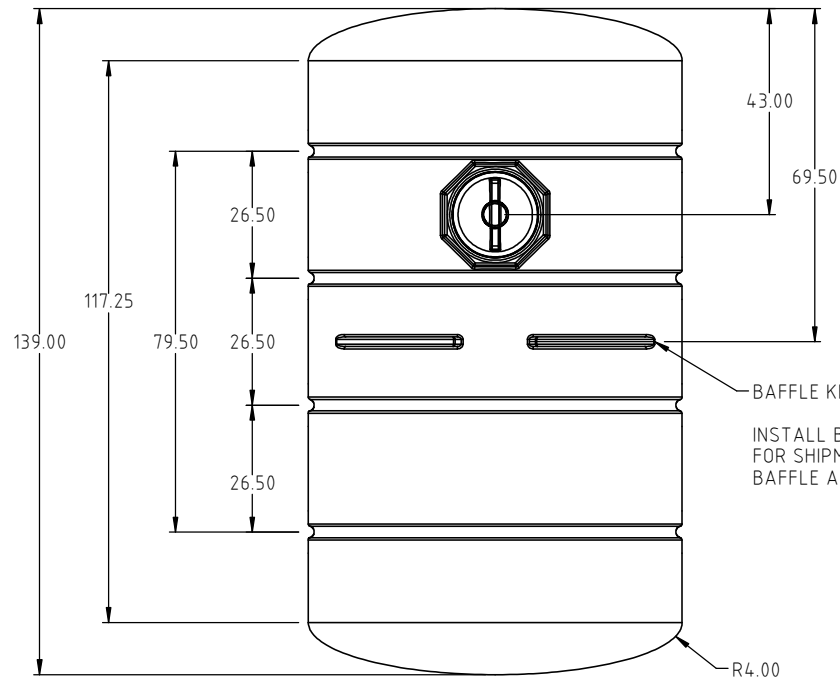

BAFFLE KEYS 4 PLACES


INSTALL BAFFLES AND STRUTS FOR SHIPMENT. SEE FS1610-78 BAFFLE ASSEMBLY DIAGRAM.

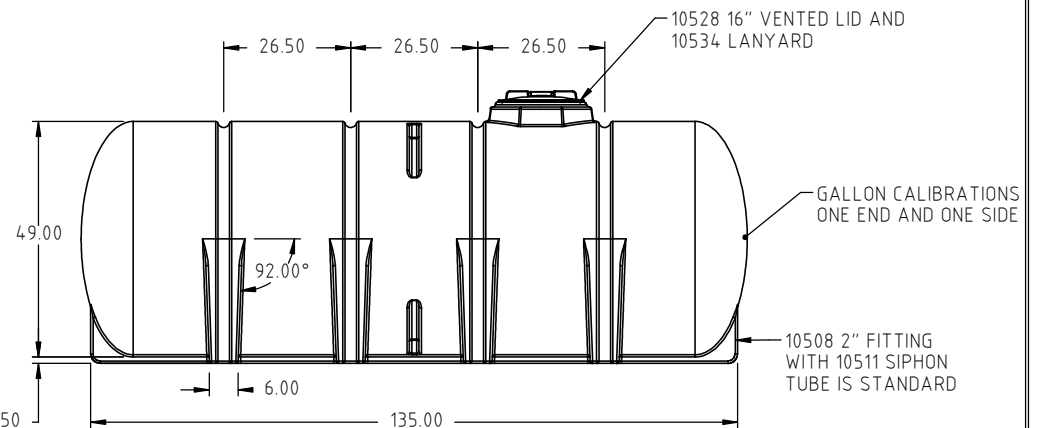


10528 16" VENTED LID AND 10534 LANYARD

GALLON CALIBRATIONS ONE END AND ONE SIDE

10508 2" FITTING WITH 10511 SIPHON TUBE IS STANDARD

				DRAWN / DATE	MATERIAL 10538
				REH 6/10/11	
				APPRD. / DATE	
REV	DESCRIPTION	BY / DATE	CCN	DHJ 6/10/11	
ALL DIMENSIONS ARE IN DECIMAL INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED		THIRD ANGLE PROJECTION ANSI 14.5M		SHOT WEIGHT: 490.00 LBS	NOTES: 1.) NOM. WALL = 0.375
<u>POLYETHYLENE</u>				SHIPPING WEIGHT: 530.00 LBS (INC. BAFFLES)	
±1% @ 68°F				FINISH:	
METAL DECIMAL ± .125" FRACTION ± 1/4" ANGLE ± 1°					



Den Hartog
INDUSTRIES, INC.

Acu Roto-Mold Injection Molding Blow Molding Sowjoy

4010 HOSPERS DRIVE S. BOX 425, HOSPERS, IOWA 51238-0425

DESCRIPTION		1610 FLAT BOTTOM LEG TANK	
SCALE	N.S.	PART NO.	FS1610-78